


P58 MAXILUBE® HEAVY DUTY AIR OPERATED GREASE PUMP



The P58 Maxilube is the latest high performing heavy duty air operated grease pump manufactured by Macnaught. Designed, engineered and manufactured by Macnaught in Australia, the P58 now provides you with a high performing, high pressure grease pump along with the Macnaught performance reliability and service.

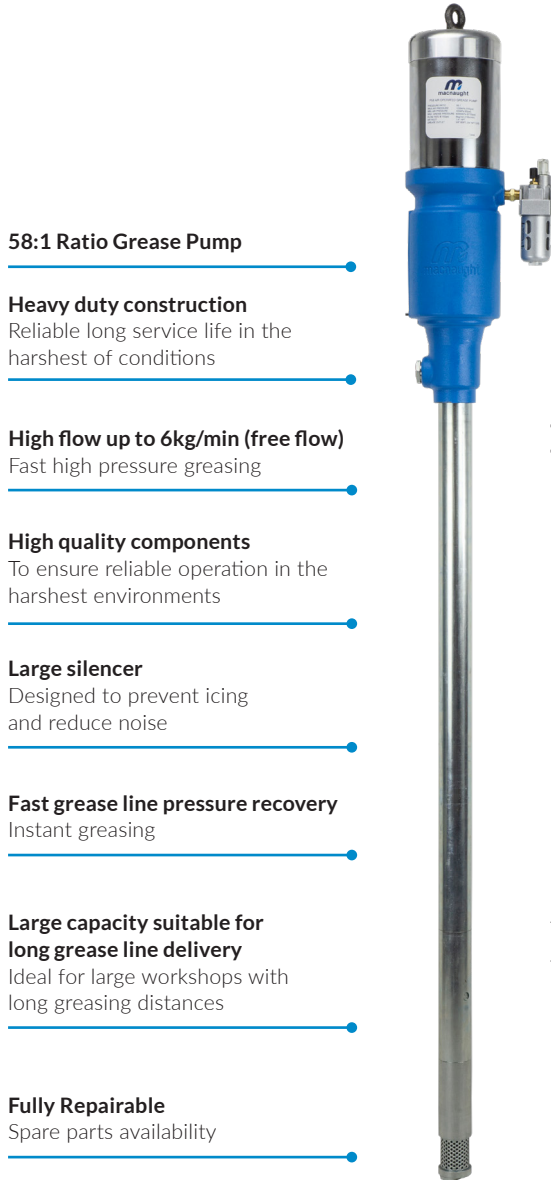

58:1 Ratio Grease Pump

Heavy duty construction

Reliable long service life in the harshest of conditions

High flow up to 6kg/min (free flow)

Fast high pressure greasing

High quality components

To ensure reliable operation in the harshest environments

Large silencer

Designed to prevent icing and reduce noise

Fast grease line pressure recovery

Instant greasing


Large capacity suitable for long grease line delivery

Ideal for large workshops with long greasing distances


Fully Repairable

Spare parts availability

Output pressure vs flow output

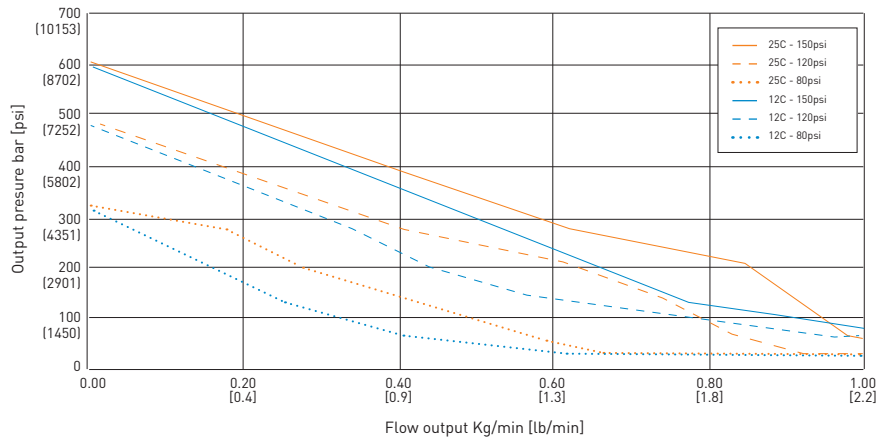

Air consumption vs flow output

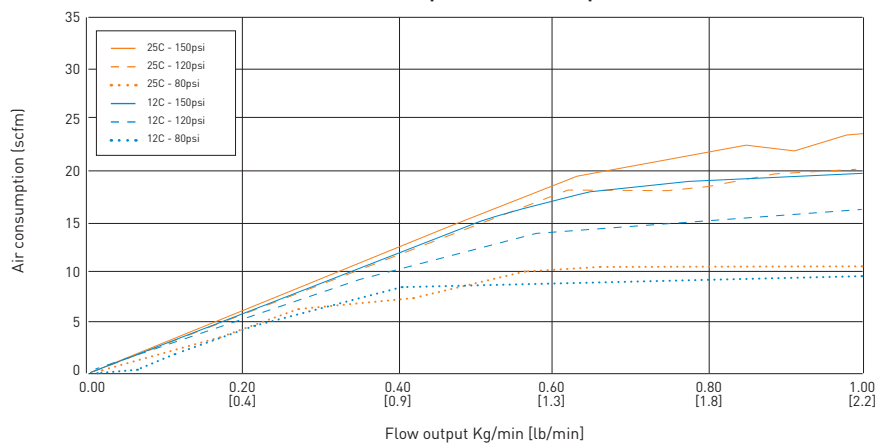

Service Parts

- P58-1K: Air Motor Overhaul Kit
- P58-3K: Seal Kit
- P58-2K: Lower Pump Service Kit

Applications:

For use in installations where long distance high pressure greasing is required

Accessories	
Lid & Follower Plate - 180 Kgs	P58LF-01
Pipe Adaptor Kit	TA-2K
Airline Oil Lubricator Kit	TA-3K
Air Filter and Regulator Kit	TA-7K
Grease hose - 2.5m	PF8
Grease hose - 4m (optional)	PF6
Booster Gun	B2-01
Graco to Macnaught adaptor	TJ061A
3" Camlock Adapter Kit	TJ062A


P58-01

P58PLF-01

P58PGLF-01


Part Number	P58-01	P58PLF-01	P58PGLF-01
Description	P58 Grease Pump - 180 Kgs	P58 Grease Pump Kit - with Lid and Follower - 180Kgs	P58 Grease Pump Kit - with Booster Gun, Lid and Follower - 180Kgs
Pressure Ratio	58:1	58:1	58:1
Air Pressure Operating Range	60 to 150psi	60 to 150psi	60 to 150psi
Air Consumption	23.5 SCFM (@120psi pressure, 20°C)	23.5 SCFM (@120psi pressure, 20°C)	23.5 SCFM (@120psi pressure, 20°C)
Max Fluid Outlet Pressure	8700psi (59, 900 kPa)	8700psi (59, 900 kPa)	8700psi (59, 900 kPa)
Air Motor Diameter	4.1" (104.7mm)	4.1" (104.7mm)	4.1" (104.7mm)
Max free Flow Delivery Rate	6 kg/min (13lb/min) (@120psi pressure, 20°C)	6 kg/min (13lb/min) (@120psi pressure, 20°C)	6 kg/min (13lb/min) (@120psi pressure, 20°C)
Air Inlet Size	1/4" BSPT	1/4" BSPT	1/4" BSPT
Fluid Outlet Size	3/8" BSPT	3/8" BSPT	3/8" BSPT
Wetted and Seal Materials	NBR	NBR	NBR
Noise Level	85 dB(A) (@120 psi)	85 dB(A) (@120 psi)	85 dB(A) (@120 psi)
Air Lubricator Included	Yes	Yes	Yes
Hose	X	X	2.5m x 6mm ID Delivery Hose
Control Gun	X	X	B2 Booster Gun with Z Swivel
Lid and Follower (180 Kgs)	X	Lid and Follower - 180Kgs (P58LF-01)	Lid and Follower - 180Kgs (P58LF-01)
Grease up to	NLGI no 2	NLGI no 2	NLGI no 2
Pump Tube Diameter	41.3 mm O.D.	41.3 mm O.D.	41.3 mm O.D.
Pump tube height	960 mm	960 mm	960 mm
Total height	1396 mm	1396 mm	1396 mm
Weight	13 Kgs	24.4 Kgs	25.5 Kgs