


AIR OPERATED DIAPHRAGM PUMP - 3/4" VITON

12
MONTHS
MACNAUGHT
WARRANTY

Elevate your fluid handling game with the Lubemate 3/4" Viton Air Operated Diaphragm Pump. This self-priming double diaphragm pump, is portable and simple to install. Suitable to use with diesel, kerosene, light oils with viscosity less than 500CST, UREA/DEF and chemicals with mild acids and mild bases.

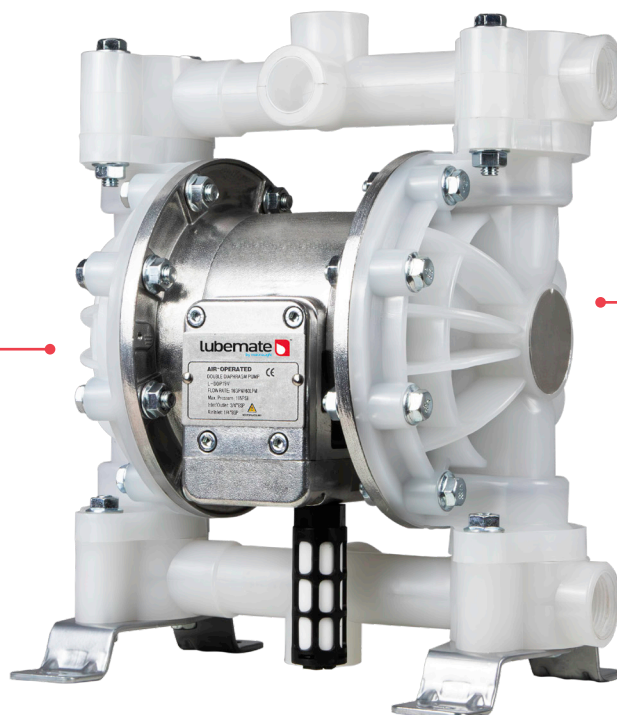

Portable and Simple Installation

Max Pressure: 115 PSI

Flow Rate: upto 60LPM

P/N: L-DDP19V

FEATURES & BENEFITS

- Self Priming Double Diaphragm Pump.
- Included ground capability to eliminate static discharge
- Suitable to use with Diesel, Kerosene, light oils with viscosity less than 500CST, UREA/DEF and chemicals with mild acids and mild bases.
- Ability to run dry.
- Variable flow rate and discharge pressure.
- Portable and simple installation.
- Constant Pumping efficiency.

TECHNICAL SPECIFICATIONS

- Inlet/outlet : 3/4" BSP
- Flow Rate: upto 60LPM
- Air Inlet: 1/4" BSP
- Max Pressure : 115 PSI
- Wetted Components: Polypropylene, Viton and NBR

PACKAGE INCLUDE

- Diaphragm Pump
- Instruction Manual